




TACTIVE

TKC

SelfKiosk



Tactive SelfKiosk TKC is designed for interactive payment applications in government, healthcare, retail, hospitality, corporate and educational settings. It includes, an industrial thermal printer with 80 mm paper width, a high-efficiency industrial thermal printer for printing on A4 size paper for documents, a barcode reader and QRcode reader for reading cards for personal identification. The structure is made of steel in a variety of customizable finishes. On both sides, right and left, a door with security lock is provided in order to ensure direct access to the thermal printer for normal roll change operations or maintenance.



Major Features

- MULTI-SERVICE KIOSK**
- VANDAL PROOF CASHLESS PAYMENT SYSTEM**
- A4 PRINTER**
- FLEXIBLE AND RELIABLE**
- SUITABLE EVERYWHERE**
- BARCODE WITH GREAT READING CAPACITY**
- EASY ACCESS FOR MAINTENANCE**
- EXCEPTIONAL VERSATILITY**

STRUCTURE AND MATERIALS





















- Solid structure in steel
- 2 compartments for maintenance
- Ergonomic design
- Anti-theft locks and invisible screws and hinges
- Frontal panel for 80mm and A4 thermal printers,
- payment system, Barcode and QR code reader
- Base with optional wheels

DISPLAY SIZES



OPTIONS


● Available ● Not Available ● Included ● On project

 CUSTOM COLOR	 AUDIO 2X5W	 TOUCH SCREEN	 UMTS-4G	 WI-FI	 BLUETOOTH	 WEBCAM	 MEDIA PLAYER	 CARD READER	 BARCODE READER
 CLIENT LOGO	 PROXIMITY IR SENSOR	 SHOCK SENSOR	 HVAC	 SOFTWARE	 ADVANCED DIAGNOSTIC	 BASE + WHEELS	 CASHLESS PAYMENT	 A4 THERMAL PRINTER	 80mm THERMAL PRINTER



TECHNICAL SPECIFICATIONS

General	Product code	TKC.P19 (Portrait)
	Screen size (inch)	19"
	Screen active area (cm)	30,1 X 37,7 (5:4)
	Display brightness (nit)	250
	Backlight technology	IPS LED
	Screen resolution (pixel)	Full HD - 1280x1024
	Contrast ratio	1000:1 (typ)
	Viewing angle (H/V)	178° / 178°
	Backlight Life cycle	50.000 hours
	System operation	24/7/365
	Screen orientation	Portrait
	Screen side	Single
	Interactive touch	Projected capacitive 10t
Environment	Environment protection	Indoor IP20 (Nema 1)
	Operating temperature	0°C / +40°C
	Environment humidity	20% - 80%
	Antivandal protection	n.a.
Enclosure	Air cooling system	n.a.
	Standard color	As shown below
	Enclosure material	Steel
Power	Glass	Scratch-resistant
	Glass reflection	n.a.
Dimensions	Vac supply	230V AC +/- 10
	Power consumption (Typ)	70W
	Height (cm)	138
	Width (cm)	56
	Depth (cm)	60
	Weight (Kg)	80
Base dimensions (cm)	50(W)x1(H)x50(D)	

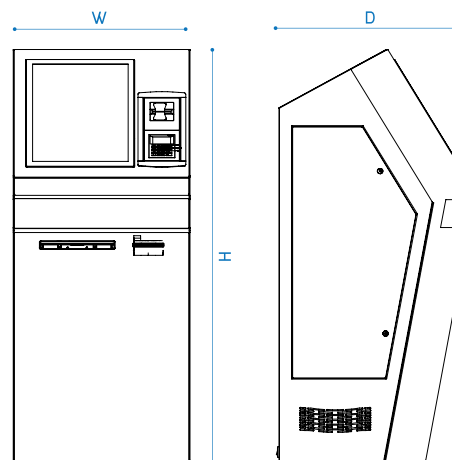

UNATTENDED CASHLESS PAYMENT

STANDARD COLORS AND FINISHING

Enclosure Colors ● Black RAL 9005

● On request

Glass Colors ● Black RAL 9005

TESTS AND CERTIFICATIONS

LVD 2014/35/UE
EMC 2014/30/UE
ROHS 2011/65/UE
IP Code IEC 60529
IK Rating IEC 62262

Safety of Information Technology Equipment:
IEC 60950-1
Safety Requirements of Audio, Video and Similar
Electronic Apparatus: IEC 60065



NOTE

Two side doors.

For more information visit www.fida.it

Copyright © 2019 Fida srl